


PC-13

Classical Swing

- From the SDM pipe with a diameter of 114 mm, the cut points of the horizontal and vertical pipes are connected with doetail metal clamps with a wall thickness of at least 3 mm so that they form a right angle to each other.
- The open parts of the 114 mm diameter SDM pipes are detailed to prevent rusting caused by water and moisture, shaped with hemispherical injection molds, closed with self-colored plastic plugs and riveted.
- Double swing ; 1 swing side strut, minimum 2,3 m 114 mm (2 pieces 2, 3 and 1 piece 1 m long Ø114 mm pipe is formed by welding together in the form of an H letter.) and 1 piece of 3 m Ø114 mm intermediate pipe and 2 pieces of protected polyethylene seat products are used Decently.
- The flat seat is designed to wrap the user's body and is made of LLDPE (Linear Low Density Polyethylene), a self-colored polyethylene plastic material weighing at least 2.5 kg.
- The swing seat railing is manufactured by LLDPE (Linear Low Density Polyethylene) blow molding manufacturing method from self-colored polyethylene plastic material weighing at least 0.5 kg.
- The solid swing chains are at least 6 mm thick, 25 micron hot-dip galvanized coated.
- The chain channels through which the chain must pass are manufactured ready to use on the product.
- The Assembly Chains are connected by chain locks to the bearing wedges, which are welded together on the swing carrier.
- In order to prevent the chain locks from being easily removed, the bolt is manufactured with an allen head and galvanized coated for corrosion resistance.
- The length of the main chain is 175 cm long, and a 6 mm caliber dipped chain is used.
- The chain channels are opened spontaneously on the product.
- Double Swing chains are manufactured in such a way as to prevent finger jamming of small children and babies.
- In front of the product, there is no movable polyethylene protection assembly in the vertical plane.
- The distance between the bottom of the polyethylene swing seat and the Decking is a maximum of 40 cm.

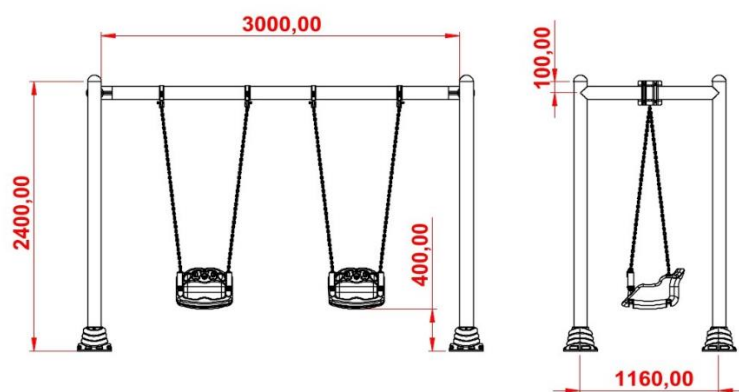

Dimensions	Side Pipe Length	230 cm
	Horizontal Pipe Length	300 cm
	Swing Seat Width	44 cm
	Swing Seat Length	32 cm
	Swing Seat Height	33 cm
	Minimum Swing Seat Weight	2,5 kg
	Minimum Weight of Swing Railing	0,5 kg
	Chain Length	175 cm
	Chain Thickness	6 mm